

ISLT 2012

Proceedings of the 8th International Symposium

On

LOWLAND TECHNOLOGY



September 11 – 13, 2012
Bali, Indonesia

ORGANIZED BY

Civil Engineering Department, Hasanuddin University
International Association of Lowland Technology
Institute of Lowland and Marine Research, Saga University

Proceedings of the International Symposium on
LOWLAND TECHNOLOGY 2012

PEER REVIEWED

Editors-in-Chief: *L. Samang, S. Pallu and T. Harianto*

Associate Editors: *S. A. Adisasmita, R. Djamaluddin and M. A. Abdurrahman*

Published by:

Civil Engineering Department, Hasanuddin University

Tamalanrea, Makassar 90245, Indonesia

Tel: 62-411-587636

Fax: 62-411-580505

Email: office@civileng-unhas.org

URL: <http://www.eng.unhas.ac.id/civileng-unhas.org>

Every paper published in the proceedings was peer reviewed by two referees in the appropriate professional field.

The Department of Civil Engineering Hasanuddin University is not responsible for the opinion expressed by various authors in their contributions presented in the Proceedings.

I S B N :978-602-95227-1-6

Printed in Indonesia

COVER PHOTO (FRONT) SUNSET AT LOSARI BEACH, MAKASSAR (courtesy of A.Y. Baeda): LAKE OF HASANUDDIN UNIVERSITY, PURA ULUN AT BEDUGUL LAKE (BACK)

International Symposium on Lowland Technology

ISLT 2010

Organizing Committee, Chairman: Prof. H. Araki (Japan)

Prof. D. T. Bergado (*Thailand*)
Prof. K. Koga (*Japan*)
Prof. J.-C. Chai (*Japan*)
Prof. M. S. M. Kumar (*India*)
Prof. Y.-J. Du (*China*)
Prof. W. Liengcharernsit (*Thailand*)

Prof. S. Hayashi (*Japan*)
Dr. A. Moqsud (*Japan*)
Prof. K. Hokao (*Japan*)
Mr. K. Ogata (*Japan*)
Dr. F. H. M. van de Ven (*Netherlands*)

Organizing Secretary:

Dr. M. Azizul Moqsud (Japan)

International Advisory Committee

Prof. M. R. Madhav (Chair, *India*)
Prof. H. B. Poorooshab (*Canada*)
Dr. M. Alfaro (*Canada*)
Prof. J. P. Carter (*Australia*)
Dr. C. Don (*Vietnam*)
Dr. D. Eom (*Korea*)
Prof. T. Y. Gan (*Canada*)
Prof. M. E. Grismer (*USA*)
Dr. J. Han (*USA*)
Dr. O. Hoes (*Netherlands*)
Prof. Y. Hosokawa (*Japan*)
Prof. C. Hua (*China*)
Dr. S. Karnchanawong (*Thailand*)
Prof. T. Katsumi (*Japan*)
Prof. Y. Kawakami (*Japan*)

Prof. C.-H. Koh (*Korea*)
Prof. G.-X. Li (*China*)
Prof. S.-Y. Liu (*China*)
Prof. J. R. Lund (*USA*)
Prof. Y. Nakamura (*Japan*)
Prof. K. Ohgushi (*Japan*)
Prof. M. Ohtsubo (*Japan*)
Dr. K. Omine (*Japan*)
Prof. A. Sridharan (*India*)
Prof. T. Tingsanchali (*Thailand*)
Dr. N. Vongtanasunthorn (*Thailand*)
Prof. L. Xu (*China*)
Prof. K. Yasuhara (*Japan*)
Prof. N. Yasufuku (*Japan*)
Prof. H.-H. Zhu (*China*)

Local Technical Committee, Chairman: Prof. L. Samang (Indonesia)

Prof. M. Selintung
Prof. M. S. Pallu
Prof. H. Parung
Prof. W. Tjaronge
Dr. T. Harianto (Co-Chair)
Dr. S. Burhanuddin
Dr. A. B. Muhiddin
Dr. R. Djamaluddin
Dr. S. A. Adisasmita
Dr. A. Thaha
Dr. S. Pamulu

Dr. A. Amiruddin
A. Abdurrahman, MEng (Secretary)
St. Hijraini, MEng
M.I. Ramli, MEng
M. Hustim, MEng
S. Hamzah, MEng
F. Elvira, MEng

Foreword

In many countries, its capital and major cities have been developed in low-lying area exposing to various stresses from nature and human treats. As a result, natural lowlands are turned into highly vulnerable area in safety, economic and environmental aspect. New record of the highest temperature and precipitation in many region of the world has challenged the knowledge and technology for protecting life, property, and ecological system in lowlands.

To achieve “Sustainability of Lowland to Climate Change and Natural Disaster”, not only main themes as for previous ISLT like Geotechnical & Geo-environmental Engineering, Water & Environmental Engineering and City Planning and Management, but also new themes on Coastal Engineering and GIS Application for Lowland Management are concerned in the 8th International Symposium on Lowland Technology (ISLT2012).

In this year, the word “Lowlands” has brought together more than 100 researchers and engineers in related fields from 15 countries to share their great experience on coping with various problems in lowlands. Six outstanding speakers are invited to give one special lectures: Prof. D. T. Bergado (Miura Lecture); two invited lecture: Prof. D. A. Suriamihardja and Prof. W. Wangsadinata; and three keynote lectures: Prof. S. L. Shen, Prof. J. C. Chai and Dr. Olivier Hoes.

This symposium is organized by International Association of Lowland Technology (IALT) and Institute of Lowland and Marine Research (ILMR), Saga University with cooperation of Department of Civil Engineering, Hasanuddin University, Indonesia. I would like to extend my sincere appreciation to Prof. M. Madhav, the President of IALT, Prof. H. Araki the Chairman of the International Advisory Committee and Organizing Committee for their support.

I sincerely wish to express my gratitude to the International and Local organizing committee and all other staff of ILMR for their great contribution. Finally, I would like to thank all the authors for their participation. Without all of you, the symposium will never be successful.

Lawalenna Samang
Local Chairman of ISLT2012

President's Address

Institute of Lowland Technology (ILT) founded in 1991 and renamed as Institute of Lowland and Marine Research has come a long way. Apart from undertaking research and education in the specific areas relevant to problems and issues of lowlands all over the world but especially in the Asian Region, a major activity has been the conduct of International Symposia on Lowland Technology fondly referred to as ISLT. These Symposia offer a great opportunity for researchers, academics, policy makers, etc., who all are interested in studying the various issues of planning, development and management of lowlands to meet once in two years to exchange ideas and developments and to share knowledge for the common benefit of all. The need for interactions is felt continually with natural disasters striking almost all countries of the region. The saddest has been the catastrophic earthquake off the coast of Japan last year. The vulnerability of coastal areas has been once again exposed with the disastrous ten to twelve meter high Tsunami. Similar events in the other regions especially in Indonesia remind us all the need for continued research and study of coastal lowlands.

Following the successful conduct of ISLTs in Saga, Bangkok and Busan, the 8th Symposium in the series is a wonderful opportunity to meet in the picturesque island of Bali thanks to the great efforts of Prof. Samang, Dr Trihianto, Mr Abdurrahman, etc. The five major themes of „Geotechnical/Geo-environmental Engineering“, „Water & Environmental Engineering“, „City – Urban Planning & Management“, „Coastal Environmental Science & Engineering“ and „GIS Application for Lowland Management“ with twenty seven subthemes would cover all or most of the relevant topics of interest to everyone. Prof. Bergado, the eminent researcher and personality has been invited to present the third Miura lecture. With several keynote and invited lectures the event promises to offer the best occasion to interact and get intellectually stimulated.

ILT and ISLT have been successful because of the foresight of the founders, in particular, Prof. Norihiko Miura. They have been fostered and nurtured by eminent personalities such as Prof. Poorooshasb, Prof. Hayashi, and the members of the Councils all these years. I would like to place on record the help, support and cooperation received from the Executive President Prof. Araki, Secretary General Dr Azizul Moqsud, Prof. Bergado, the conference organizers for the success of the symposium.

Wishing the Symposium a be great event to be remembered and cherished and looking forward to meet you all,

Madhav Madhira

President, IALT

List of Reviewers

The Editors would like to thank the following individuals for their assistance in refereeing submitted papers for ISLT 2012.

Prof. H. Araki

Dr. W. Liengcharernsit

Prof. L. Samang

Dr. T. Inohae

Dr. T. Harianto

Dr. O. A. C. Hoes

Dr. A. B. Muhiddin

Dr. D. Suetsugu

Dr. R. Djamaluddin

Dr. A. Thaha

Dr. S. A. Adisasmita

Prof. S. Asuri

Prof. H. Yamanishi

Prof. S. Pallu

Dr. N. Vongthanasunthorn

Prof. M. Selintung

Dr. M. Kinashi

Dr. M. Azizul Moqsud

Dr. T. Hino

Dr. B. Setiawan

Prof. W. Tjaronge

Prof. H. Parung

Dr. S. Pamulu

CONTENTS

SPECIAL LECTURE

THE MIURA LECTURE

<i>D. T. Bergado</i>	1
----------------------------	---

KEYNOTE LECTURES

STATE OF PRACTICE OF JET GROUTING IN SHANGHAI: FROM TECHNOLOGY DEVELOPMENT TO SCIENTIFIC RESEARCH

<i>S. L. Shen, Z. F. Wang, Y. S. Xu and Y. H. Kum</i>	13
-------------------------------------------------------------	----

CONSOLIDATION THEORY AND DEFORMATION ANALYSIS UNDER VACUUM LOADING

<i>J. -C. Chai and T. Hino</i>	21
--------------------------------------	----

ACT OF DESPAIR OR FULL-FLEDGED EXPERIMENT: RETROSPECTIVE RESEARCH ON THE 1945 WIERINGERMEER FLOOD

<i>O.A.C. Hoes, R. W. Hut and M. Boomgaard</i>	31
------------------------------------------------------	----

PART 1

GEOTECHNICAL/GEOENVIRONMENTAL ENGINEERING

CHAPTER 1 : PROPERTIES OF SOILS (1)

LABORATORY AND FIELD STRENGTH OF CEMENT SLURRY TREATED ARIAKE CLAY

<i>Y. Igaya, T. Hino and J.-C. Chai</i>	40
-----------------------------------------------	----

EXPERIMENT ON FIBROUS PEAT SUBJECTED TO REDUCTION OF WATER CONTENT

<i>N. E. Mochtar and M. K. Wardani</i>	46
----------------------------------------------	----

CONSOLIDATION BEHAVIOR AND MICROSTRUCTURE OF BOTTOM SEDIMENT IN ISAHAYA BAY

<i>R. Jia, T. Hino, T. Hamada and J.X. Nie</i>	51
------------------------------------------------------	----

PREDICTION FOR CBR UNSOAKED VALUE TO CBR SOAKED VALUE AND INDEX PROPERTIES OF CLAY-SAND MIXTURE OF PEKANBARU SOILS

<i>S. A. Nugroho, M. Yusa. and S. R. Ningsih</i>	59
--------------------------------------------------------	----

COMPARATIVE STUDY OF DETERMINATION OF LIQUID LIMIT BY PERCUSSION CUP, CONE, AND K_o -STRESS METHODS

<i>H. B. Nagaraj, A. Sridharan and B. V. Madhu</i>	66
----------------------------------------------------------	----

BASIC STUDY OF THE FUNDAMENTAL BEHAVIOR OF ARIAKE MARINE CLAY

<i>F. Usman, T. Hino, T. Negami, T. Harianto and R. Jia</i>	75
-------------------------------------------------------------------	----

CHAPTER 2 : GROUND IMPROVEMENT AND GEOSYNTHETICS (1)

PHASE ANALYSIS OF SEDIMENT DEPOSITION FROM FLOODING OF THE JOBARU RIVER USING GEOSLICER <i>T. Hino, T. Ichihara, K. Ohgushi, R. Jia and T. Harianto</i>	82
CHARACTERISTIC OF UNCONFINED COMPRESSIVE STRENGTH OF SANDY CLAY STABILIZED BY CEMENT MIXTURE SUGAR-PALM FIBERS <i>P. Suroso, L. Samang, W. Tjaronge and T. Harianto</i>	90
MICRO-STUCTURAL CHARACTERISTICS OF LIME STABILIZED BENTONITE <i>A. Eisazadeh, K.A. Kassim and H. Nur</i>	94
EFFECTS OF LIME MIXING ON COMPRESSIVE STRENGTH OF COMPACTED LIME-MIXED QUARRY DUSTS <i>K. Nagai, D. Suetsugu and H. Hara</i>	98
THE DEWATERING PROPERTIES OF DREDGED CLAY MIXED WITH STEEL SLAG <i>J. Tajiri, K. Kasama, Y. Kasugai, K. Zen and G. Chen</i>	102
BEHAVIOR OF FIBROUS PEAT SOIL STABILIZED WITH RICE HUSK ASH (RHA) AND LIME <i>F. E. Yulianto and N. E. Mochtar</i>	106

CHAPTER 3 : LAND SUBSIDENCE

BEARING CAPACITY OF REINFORCED FOUNDATION BEDS ON SOFT NON-HOMOGENEOUS GROUND <i>K. Rajyalakshmi, Madhira R. Madhav and K. Ramu</i>	111
EXPERIMENTAL TESTS AND NUMERICAL ANALYSES OF A SCALED SHALLOW FOUNDATIONS AT THE EDGE OF TRASS-SAND SLOPE WITH DR = 50% <i>H. Wibowo, Y.A. Pranata and C. Stevanus</i>	116
PHYSICAL AND NUMERICAL MODELLING OF THE MITIGATION OF SETTLEMENT DUE TO FOOTING INTERACTION IN CLAY <i>R. Effendi</i>	122
ANALYSIS OF REINFORCED SOIL WALL CONSIDERING STRESS DEPENDENT ANGLE OF SHEARING RESISTANCE <i>S. K. Karthik, G. V. N. Reddy, M. R. Madhav and B. Umashankar</i>	131
EFFECT OF SALT ON THE HYDRAULIC CONDUCTIVITY AND COMPRESSIBILITY OF THE TWO SOIL-BENTONITE MISTURES WITH DIFFERENT BENTONITE CONTENTS <i>A. K. Mishra, M. Ohtsubo and T. Higahshi</i>	136

CHAPTER 4 : GEOENVIRONMENTAL ISSUES IN LOWLAND AREA

THE SUCTION PROFILE OF UNSATURATED CUT-SLOPE AT DIFFERENT HYDRAULIC CONDUCTIVITY DURING LOW INTENSITY RAINFALL <i>Khalid Mahmood and Jin Man Kim</i>	143
LONG-TERM INVESTIGATION OF SULFIDE CONTENT OF TIDAL MUD OF ARIAKE SEA <i>S. Amamoto, D. Suetsugu, H. Hara and K. Katae</i>	147
PHASE CONCEPT STUDY OF MUDFLOW INITIATION AT THE CIWIDEY TEA PLANT IN INDONESIA <i>Shannon Hsien-Heng Lee and B. Widjaja</i>	152
PORE-SIZE DISTRIBUTION OF LIME-TREATED SOIL UNDER SEAWATER <i>H. Hara, D. Suetsugu and S. Hayashi</i>	156
A NEWLY DEVELOPED CLIMATE CONTROL APPARATUS TO INVESTIGATE EVAPORATION BEHAVIOR <i>J. Teng, N. Yasafuku, Q. Liu and K. Omine</i>	161
THE INFLUENCE OF PLASTICITY INDEX ON THE SITE RESPONSE <i>M. Khari, K. A. Kassim and A. Adnan</i>	167
SITE CHARACTERIZATION OF TAYTAY, PALAWAN, PHILLIPINESS RAINFALL TRIGGERED SHALLOW LANDSLIDE <i>C. A. Bacosa, E. T. Calo and A. J. Reyno</i>	173

CHAPTER 5 : PROPERTIES OF SOIL (2)

PERFORMANCE VARIATION DUE TO AIR VOID DISTRIBUTION IN OPEN-GRADED FRICTION COURSE PAVEMENT (OGFC) <i>N. A. Qureshi, I. A. Qureshi and S. M. Jamil</i>	184
UPSCALING SOIL WATER RETENTION FUNCTIONS USING PARTICLE SIZE DISTRIBUTION <i>S. Liu, N. Yasafuku, Q. Liu, K. Omine and H. Hemanta</i>	189
GCL/GM AND CLAYEY SOILS INTERFACE SHEAR STRENGTHS <i>A. Saito, K. Sari and J. -C. Chai</i>	199
EFFECT OF CONCRETE WASTE AS STABILIZATION MATERIAL ON CBR VALUE AND SWELLING POTENTIAL OF EXPANSE SOIL <i>M. W. Tjaronge, I. Maricar, A. B. Muhiddin and M. Sutiono</i>	204
DISPLACEMENTS OF GPA IN NORMALLY CONSOLIDATED SOFT SOIL (UNDRAINED MODULUS INCREASING WITH DEPTH) <i>B. Vidyaranya , M.R. Madhav and M. Kumar</i>	208

THE STRENGTH PROPERTY OF SLAG-MIXED AND DEWATERED CLAY <i>T. Takeshita, K. Kasama, Y. Kasugai, K. Zen, G. Chen</i>	214
-----------------------------------------------------------------------------------------------------------------------------	-----

STUDY ON CLAY LINER CHARACTERISTIC OF SANITARY LANDFILL <i>A. Zubair, L. Samang, and A. Kamal</i>	218
------------------------------------------------------------------------------------------------------------	-----

CHAPTER 6 : GROUND IMPROVEMENT AND GEOSYNTHETICS (2)

CONSTRUCTION OF A LONG RAILWAY EMBANKMENT SUPPORTED BY THE PILED RAFT ON CLAY DEPOSITS <i>S. G. Han, S. O. Song and S. K. Kim</i>	227
-----------------------------------------------------------------------------------------------------------------------------------------------	-----

PASSIVE PRESSURE ON RETAINING WALL WITH ROTATIONAL MOVEMENT MODES WITH ANISOTROPIC SAND AS BACKFILL <i>A. B. Muhidin and I. Ishibashi</i>	233
-------------------------------------------------------------------------------------------------------------------------------------------------------	-----

EFFECT OF CREEP OF GRANULAR PILE ON RESPONSE OF GRANULAR PILE REINFORCED SOFT GROUND-EFFECT OF AREA RATIO <i>S. Kandru, M. R. Madhav and E. C. N. Peter</i>	245
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

ANALYTICAL SOLUTION FOR CONSOLIDATION OF SOILBAG CONSIDERING REAL FORM AND IMPEDED BOUNDARY <i>B. Niu, X. W. Tang, X. L. Chen and H. Y. Wang</i>	251
--------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

COMPARISON OF POLYESTER GEOGRID AND STEEL GRID FOR VERIFICATION OF MODIFIED K-STIFFNESS WORKING STRESS METHOD ON HARD FOUNDATION <i>P. Baral, S. Duangkhae and D.T. Bergado</i>	256
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

GREEN ENERGY FROM RICE PLANT MICROBIAL FUEL CELL IN ARIAKE SOIL <i>M. A. Moqsud, K. Omine, M. Hyodo and Y. Nakata</i>	263
--------------------------------------------------------------------------------------------------------------------------------	-----

PART 2 WATER/ENVIRONMENTAL ENGINEERING

CHAPTER 1 : GROUNDWATER CONTAMINATION AND MANAGEMENT

BASIC STUDY ON WATER QUALITY MANAGEMENT IN THE RESERVOIR OF THE ISAHAYA BAY LAND RECLAMATION PROJECT <i>Y. Mitsugi, N. Vongthanasunthorn, Y. Misima, K. Koga, H. Araki and P. Ittisukananth</i>	267
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

DEVELOPMENT OF PHOSPHORUS RECOVERY SYSTEM USING NLDH <i>K. Nakahara, H. Araki, Y. Mishima, Y. Matsuo and T. Turuhashi</i>	274
------------------------------------------------------------------------------------------------------------------------------------	-----

EFFECT OF CALCIUM AND MAGNESIUM IONS ON PERFORMANCE OF UASB SYSTEM <i>S. Karnchanawong and S. Boonarsa</i>	280
------------------------------------------------------------------------------------------------------------------------	-----

TSS VALUE AND ITS ROLE AS A BENCHMARK OF THE TAILINGS MANAGEMENT BY PT FREEPORT INDONESIA IN MODIFIED AJKWA DEPOSITION AREA, TIMIKA, PAPUA <i>B. K. Susilo, E. Sutriyono, R. H. Susanto and B. Setiawan</i>	286
INFLUENCE OF RAINFALL PATTERN ON THE PREDICTION OF CONTAMINANT DISPERSION IN GROUNDWATER <i>B. Kitikas, U. Duangduan and S. Sirivithayapakorn</i>	291
EXPERIMENTAL MODEL OF INFILTRATION BEHAVIOUR IN ORGANIC SOIL <i>H. Arfan</i>	294
INTEGRATED LAKE WATERSHED MANAGEMENT AS A FRAMEWORK TO ACHIEVE A SUSTAINABLE DEVELOPMENT OF LAKE YURIRIA, MEXICO <i>S. Silva, A. Bernal, M. Ortiz and G. Cuevas</i>	301
RESOURCES CLIMATE MANAGEMENT IN ANTICIPATION OF THE IMPACT OF THE CLIMATE CHANGE FOR RICE PLANTING PATTERN IN NORTH SUMATRA <i>K. E. Ramija and S. F. Batubara</i>	308
 CHAPTER 2 : WATER RESOURCES AND WATERSHED MANAGEMENT (1)	
FOOD WEB STRUCTURE IN URBAN DRAINAGE CHANNEL AND ITS CONJUNCT DITCH <i>K. Hiramatsu, T. Sakaida, K. Yonebayashi, E. Ichion, T. Onishi and S. Nishimura</i>	316
NUMERICAL SIMULATION AND ANALYTICAL VALIDATION FOR TRANSIENT TEMPERATURE DISTRIBUTION IN AN AQUIFER THERMAL ENERGY STORAGE SYSTEM <i>S. Ganguly, N. Seetha and M. S. M. Kumar</i>	322
RESPONSE AND MEASURES TO STRONG INTENSITY RAIN FALL OF SAGA LOWLAND <i>H. Araki, Y. Mishima, K. Yano, S. Ikari and S. Srinivasulu</i>	331
WATER FOOTPRINT OF THAILAND'S FOOD INDUSTRY: CASE STUDY OF RICE NOODLES PRODUCTIONS <i>P. Ittisukananth</i>	335
GREEN ROOF AS A POTENTIAL SUSTAINABLE STRUCTURE FOR RUNOFF REDUCTION <i>H. Kasmin and S. Musa</i>	341
ANN BASED PREDICTION AND SENSITIVITY ANALYSES OF MAXIMUM DRY UNIT WEIGHT AND OPTIMUM MOISTURE CONTENT VALUES OVER A LARGE RANGE <i>S. Srinivasulu, V. Padmavathi, H. Araki, S. Borzooei and M. R. Madhav</i>	346

CHAPTER 3 : WASTEWATER TREATMENT AND WATER PURIFICATION

EFFECT OF OZONATION ON ORGANIC COMPOUNDS IN BREWERY WASTEWATER <i>P. Suwanvitaya and S. Jodpimai</i>	353
TURNED WINDROW COMPOSTING FOR ZERO DISCHARGE OF MULBERRY PULP WASTEWATER <i>B. Jolanun and C. Chiemchaisri</i>	358
THE WATER QUALITY AND MANAGEMENT PLAN OF BATUR LAKE BALI INDONESIA <i>I W. Arthana and I W. Restu</i>	363
PREDICTION OF DISSOLVED IRON (FE) CONCENTRATION USING INTEGRATED HYDRODINAMIC AND WATER QUALITY NUMERICAL MODEL ON BARAMBAI TIDAL SWAMP RECLAMATION CHANNEL <i>R. Riduan</i>	372
APPROPRIATE TECHNOLOGY IN PROVIDING CLEAN WATER FROM WASTEWATER OF SASIRANGAN <i>Q. Sholihah , R. Setyaningrum and L. Marlenae</i>	377
POTENTIAL RISKS AND RETURNS OF USING SHALLOW GROUND WATER FOR SECONDARY CROPS ON LOWLAND PADDY FIELDS IN INDONESIA: CASE STUDY IN SOUTH SULAWESI <i>D. Useng, M. Achmad, Suhardi , A. Munir and Darmawan</i>	381
APPROPRIATE TECHNOLOGY WATER SUPPLY USING WATER HYACINTH AND BLADYGRASS AS A BIOMASS FILTER ON DIAMOND MINING WATER CEMPAKA DISTRICT BANJARBARU <i>R. Setyaningrum , Q. Sholihah and L. Marlina</i>	389

CHAPTER 4 : WATER POLLUTION IN RIVER AND LAKE

STRUCTURE OF MACROINVERTEBRATES IN OXBOW LAKES DIFFERED BY CONNECTIVITY WITH THE LOWLAND LYNA RIVER (CENTRAL EUROPE) <i>K. Obolewski, K. G. Lewczuk, A. Strzelczak, S. Kobus and J. A. Dunalska</i>	394
THE IMPACT OF THE CLIMATE ON THE EFFECTIVNESS OF THE LAKE RESTORATION BY THE HYPOLIMNETIC WITHDRAWAL METHOD <i>J. A. Dunalska, G. Wisniewski, K. Glinska-Lewczuk and K. Obolewski</i>	406
EVALUATION AND OPTIMIZATION OF HANDEEL AS PUBLIC WATER CANALS ON BANJARESE TRADITIONAL TIDAL PADDY RICE FIELD SYSTEM <i>M. A. Noor, N. Helda and Y. F. Arifin</i>	412
STUDY ON THE HABITAT DISTRIBUTION OF ILYOPLAX DESCHAMPSI IN A TIDAL AREA OF THE USHIZU RIVER, JAPAN <i>K. Nishimura and H. Yamanishi</i>	418

DEVELOPMENT OF MATHEMATICAL MODELS FOR FLOOD ROUTING IN THE UPPER PING RIVER BASIN, NORTHERN THAILAND <i>A. Kamsai, P. Ittisukananth and W. Liengcharernsit</i>	423
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

CHAPTER 5 : WATER RESOURCES AND WATERSHED MANAGEMENT (2)

EFFECTIVENESS OF COLLABORATION-BASED WATERSHED MANAGEMENT: THE OREGONIAN WATERSHED COUNCILS EXPERIENCE <i>S. Silva, P. Kay, M. Ortiz, A. Bernal and C. Gutierrez</i>	432
SIMULATION OF GROUND WATER CONTOUR AT COASTAL AREA SOUTH SULAWESI <i>A. Munir, Syamsuddin, C. Suhardi and M. Achmad</i>	440
ESTIMATING WATER RESOURCES EXPORT FROM MOUNTAINS DAM WATERSHED INTO SAGA PLAIN, JAPAN <i>C. Supit and K. Ohgushi</i>	455
NUMERICAL MODELS ANALYSIS ON THE USE OF SAND COLUMNS AT RECHARGE RESERVOIR <i>A. Azis, S. Pallu, A. Thaha, A. Sumakin and Sugiharto</i>	462
ANALYSIS OF WATER SUPPLY NETWORK PLANNING IN DISTRICT OF RANTEPAO SUBDISTRICT OF NORTH TORAJA <i>J. Patanduk and Denny C. S.</i>	469
ANALYSIS ON SOIL ABSORPTION OF TELKOMAS REGION, BIRINGKANAYA DISTRICT, MAKASSAR CITY <i>M. Selintung and J. Patanduk</i>	474
AN INTEGRATED RAINFALL, HYDROLOGICAL AND FLOOD INUNDATION MODEL FOR KOTA TINGGI, MALAYSIA CATCHMENT <i>M.R.M. Adib, T.Wardah, A.Noratina, I.H.Lokman, M.B.Saifullizan, D.Rokiah, A.Junaidah</i>	481

PART 3 CITY/URBAN PLANNING AND MANAGEMENT

CHAPTER 1 : URBAN DESIGN AND DEVELOPMENT PLANNING (1)

A STUDY ON EFFECT FACTORS OF THE LOCATION OF DESIGN SERVICES COMPANIES- A CASE IN HANGZHOU <i>S. Luo, X. Hu and B. Sun</i>	506
RESPECTING THE HISTORICAL SPIRIT AND EXPLORING THE CONTEMPORARY CONNOTATION---TAKE THE REBUILDING XILING IN XIIX WETLAND OF HANGZHOU, ZHEJIANG, CHINA <i>J. H. Wu and F. Chen</i>	510

A FORECAST OF ZHOUSHAN URBAN DEVELOPMENT BASED ON THE BACKGROUND OF "ZHOUSHAN ARCHIPLEAGO <i>R. Zhang and L. Xu</i>	517
LABOR MANAGEMENT INFORMATION SYSTEM IN CONSTRUCTION PROJECT <i>M. Tanubrata, S. K. Yefta and F. H. Halim</i>	521
GIANT SCALE IN NEW DEVELOPED URBAN DISTRICTS <i>N. P. Hu</i>	527
TRANSFORMATION MECHANISM AND THE CULTURAL CONNOTATIONS OF CONTEMPORARY SELF-BUILT HOUSING IN HANGZHOU <i>Z. Bo and H. Yong</i>	532
A STUDY ON PREFERENCE FOR FINAL RESIDENCE TAKING INTO CONSIDERATION THE NECESSITY OF NURSING-CARE: A CASE STUDY IN LOCAL REGION, HITACHI-CITY <i>M. Kinashi</i>	537
THE INFLUENCE OF CLIMATIC FACTOR ON BUILDING STRUCTURAL DESIGN AND HOUSEHOLD ELECTICITY CONSUMPTION IN BANGKOK AND ITS VICINITY, THAILAND <i>C. Pratchayawutthirat, W. Gao and P. Iamtrakul</i>	543
 CHAPTER 2A : COASTAL AND WATER FRONT PLANNING	
IMPACT OF URBAN DEVELOPMENT TO COASTAL BANTIK SETTLEMENT IN MALALAYANG, INDONESIA <i>P. P. Egam, N. Mishima and T.Y.W. Subroto</i>	554
ECONOMICAL ANALYSIS OF TRAFFIC CONGESTION IN DHAKA CITY <i>T. Khan</i>	561
REVITALIZATION OF URBAN WATERFRONT A STUDY FOR THE REGENERATION OF HANGZHOU HISTORICAL DISTRICT "CANAL PARADISE" <i>Y. Hong, C. Hua and H. Yan</i>	568
NEW TOWN PHENOMENON AND ITS CHARACTERISTICS IN PLANNING AND DESIGN OF THE YANGTZE RIVER DELTA MEGALOPOLIS <i>Y. Zhou, K. Wang and L. Xu</i>	574
AN OPTIMIZED INVESTMENT METHODOLOGY FOR SUSTAINABLE REHABILITATION OF ROAD INFRASTRUCTURE IN LOWLAND AREAS <i>M. Yadollahi, R. M. Zin and A. Adnan</i>	580
DRIVING CYCLE OF PASSENGER CARS ON HETEROGENEOUS TRAFFIC SITUATIONS : CASE STUDY ON AN URBAN ROAD IN MAKASSAR, INDONESIA <i>S. H. Aly, M. I. Ramli and T. Sumi</i>	586

CHAPTER 2B : URBAN DESIGN AND DEVELOPMENT PLANNING (2)

RESTRUCTURING AND PRESERVATION OF HISTORICAL BUILDING AND ENVIRONMENT :- A CASE OF RESIDENTIAL IN WESTLAKE , HANGZHOU, CHINA <i>T. Tanachawengsakul , D. Jia , P. Iamtrakul , Y. Ishimaru , K. Hokao and W. Jie</i>	592
LABOR MANAGEMENT INFORMATION SYSTEM IN CONSTRUCTION PROJECT <i>M. Tanubrata , S. K. Yefta and F. H. Halim</i>	604
INVESTIGATING THE LOW-INCOME SETTLEMENT IN AN URBANIZATION AND URBAN FORM A CONSEQUENCES OF BANGKOK GROWING CITY, THAILAND <i>U. Shummadtayar , H. Kazunori and P. Iamtrakul</i>	610
TOURISM ORIENTED RURAL COMMUNITY PLANNING FROM THE PERSPECTIVE OF URBAN-RURAL INTEGRATION A CASE STUDY OF RURAL CONSTRUCTION IN ANJI, ZHEJIANG <i>P. -W. Sun, Z. Wang and Y. He</i>	620
THE SPACE PLANNING AND DESIGN OF COMMUNITIES UNDER NEW TOWNS CONSTRUCTION PROGRAM IN NORTHERN ZHEJIANG PLAIN, CHINA <i>Z. Qian , Z. Wang and L. Wang</i>	626
RESEARCH OF CO2 EMISSION OF CAMPUS BUILDINGS BASED ON LIFE CYCLE ASSESSMENT ----- TAKING ZHEJIANG UNIVERSITY FOR EXAMPLE <i>H. X. Ang , C. Wei. and Q. L. Juan</i>	631
REVIEW ON PEOPLE'S LIFESTYLE AND ENERGY CONSUMPTION IN ASIA COMPARISON STUDY OF INDONESIA, THAILAND, AND CHINA <i>D. Novianto , G. Weijun , C. Prateyayawuthirat and J. Yanqi</i>	635

CHAPTER 3A : URBAN DESIGN AND DEVELOPMENT PLANNING (3)

SUB-URBAN LOW-LYING AREA CONVERSION DUE TO THE HOUSEHOLD EMERGING IN COLOMBO METROPOLITAN REGION OF SRILANKA <i>GPTS Hemakumara and R. Rainis</i>	642
TRANSITION OF AGRICULTURE AREA IN TO SUSTAINABLE INDUSTRIAL CITY <i>A. Cahyaningsih</i>	648
RESEARCH OF ZHOUSHAN CORRIDOR PLANNING BASING ON THE CULTURE RESOURCE <i>L. Huang, Y. He, F. Wen and P. Shen</i>	655
SUBURBAN COMPOSITE LANDSCAPE CORRIDOR DESIGN STUDY OF DINGHAI DISTRICT IN ZHOUSHAN <i>F. Wen, Z. Wang and Y. He</i>	659

THE CHARACTERISTIC ANALYSIS OF HISTORIC DISTRICT REVIVAL IN SANJIANGKOU: A CASE STUDY ON TIANYI SQUARE AND THE OLD BUND <i>S. Ye and X. Lei</i>	664
ON THE CITY SPACE PATTERN AND ORGANIC RENEWAL DESIGN OF JINGNING, ZHEJIANG PROVINCE <i>X. Xiaodi and Z. Yuheng</i>	670
EVALUATION AND ANALYSIS OF FIRE SAFETY PERFORMANCE IN COMMERCIAL COMPLEX <i>J. Shi</i>	677
RURAL PLANING IDEAS UNDER THE CONCEPT OF "CITY SLOW" <i>N. Shuwen, W. Zhu, T. Yiqi and W. Ling</i>	686
LAND USE AND POPULATION CHANGE DYNAMICS IN NORTH-EASTERN CEBU CORRIDOR <i>H. Zanoria , A. Diola , R. Villavelez and O. Mana</i>	692
 CHAPTER 3B : TRANSPORTATION PLANNING FOR SUSTAINABLE DEVELOPMENT (3)	
SUSTAINING FUTURES OF URBAN MASS TRANSIT IN BANGKOK <i>P. Iamtrakul</i>	709
POROUS ASPHALT,,S CONTRIBUTION ON ROAD SAFETY AND ENVIRONMENT <i>N. Ali , M. I. Ramli and M. Hustim</i>	719
THE OPERATION EFFECTIVENESS EVALUATION OF HANGZHOU QIANJIANG NEW CONSTRUCTION RIVERSIDE WALKING SPACE BASED ON POE ANALYSIS <i>Y. Lu and L. Xu</i>	725
ANALYSIS ON NEW CHARACTERISTICS OF DEVELOPMENT ZONE IN YANGTZE RIVER DELTA REGION OF CHINA <i>C. Zhiyu and X. Lei</i>	732
RESEARCH OF THE MECHANISM OF THERMAL BRIDGE IN SELF-INSULATION SYSTEM IN HOT SUMMER AND COLD WINTER AREAS <i>N. D. Jia , B.J. Ge and C. D. Ying</i>	741
A STUDY ON EFFECT FACTORS OF THE LOCATION OF DESIGN SERVICES COMPANIES- A CASE IN HANGZHOU <i>S. Luo , X. Hu and B. Sun</i>	744
REVITALIZATION OF URBAN WATERFRONT A STUDY FOR THE REGENERATION OF HANGZHOU HISTORICAL DISTRICT "CANAL PARADISE" <i>Y.Hong , C. Hua and H. Yan</i>	750
ANALIZING THE LEVEL OF SERVICE OF THE JAKARTA ROAD NETWORK <i>E. Tambunan</i>	756

CHAPTER 4 : CREATIVE RESTRUCTURING AND PRESERVATION OF URBAN ENVIRONMENT

AMPHIBIOUS URBANIZATION AS A FLOOD MITIGATION STRATEGY FOR LOW-LAND AREA <i>M. A. Nekooie, M. I. Mohamad and Z. Ismail</i>	762
IMPLEMENTATION OF THREE_DIMENSIONAL URBAN SYSTEM IN THE REGENERATION OF HANGZHOU CITY CENTER <i>Z. Yingsheng, Z. Yijun and G. Yujiang</i>	769
ECOLOGY, PRODUCTION AND LIVING: RESEARCH ON THE PLANNING AND CONSTRUCTION OF RURAL FEATURES BASED ON THE EPL SYSTEM <i>C. Xu, Z. Chai and Y. Gao</i>	773
THE STATUS QUO OF LOW-CARBON CBD DEVELOPMENT IN CHINA <i>M. Zhiyuan and X. Lei</i>	781
ECOLOGICAL MATERIALS -- FOAM GLASS, THE PROPERTIES AND THE APPLICATION IN MODERN ARCHITECTURE <i>F. Wang and W. Li</i>	786
AN ALTERNATIVE APPROACH FOR CLARIFYING ELDERLY PEOPLES ACTIVITY AND DESIRABLE LAYOUT OF URBAN FORM <i>T. Inohae, T. Nagaie and K. Hokao</i>	792
SOUNDSCAPE TIMING DESIGN IN CHINESE CLASSICAL GARDENS-- A CASE STUDY OF GEYUAN GARDEN <i>G. Min and G. Jian</i>	800

CHAPTER 5 : STRUCTURAL ENGINEERING AND ECO-MATERIAL

PRELIMINARY STUDY OF THE UNIQUE TOPOGRAPHY AS MITIGATION AGAINST TSUNAMI HAZARD <i>U. Fadly, B. K. Eddi and H. Septiana</i>	809
MERAPI VOLCANIC ASH AS AN ECO-MATERIAL OF CONCRETE FILLER <i>I. Bali and F. Sitorus</i>	815
FLEXURE BEHAVIOR OF RC BEAMS STRENGTHENED WITH CERP GRID <i>A. A. Amiruddin</i>	819
CONDITION ASSESMENT OF REINFORCED CONCRETE BUILDING <i>W. Wuryanti</i>	826
FLEXURAL CAPACITY OF CRACKED CONCRETE BEAMS STRENGTHENED USING GFRD SHEET <i>R. Djamaluddin, T. Harianto and A. M. Akkas</i>	832

THE RESEARCH OF RURAL SPATIAL FORM BASED ON THE PRINCIPLE OF ECO-FEEDBACK MECHANISM--TAKING ZHEJIANG PROVINCE AS AN EXAMPLE <i>W. Tao and W. Zhu</i>	839
SIMULTANEOUS MODELLING EFFECT OF JOB DESIGN AND ORGANIZATIONAL CULTURE ON THE EMPLOYEE'S PERFORMANCE OF INFRASTRUCTURE CONSULTANT SERVICES IN INDONESIA <i>N. Hamid</i>	845
 CHAPTER 6 : TRANSPORTATION PLANNING FOR SUSTAINABLE DEVELOPMENT (2)	
ENVIRONMENTAL ASSESMENT TOOL FOR SINGLE LANDED HOUSE AS AN APPROACH TO MANAGE RAPID URBAN HOUSING DEVELOPMENT <i>V. Fauzianti</i>	854
THE CHOICE OF CONSTRUCTION LAND IN COASTAL CITIES BASED ON SCENARIO PLANNING <i>Y. Gao, W. Li and W. Yu</i>	859
A STUDY ON THE CHANGES OF WATERWAY IN CENTRAL AREA OF HANGZHOU BASED ON THE HISTORICAL MAPS <i>X. Bing and W. Hui</i>	868
LEACHABILITY OF HEAVY METALS FROM FIRED CLAY BRICKS INCORPORATED WITH CIGARETTE BUTTS <i>A. A. Kadir and A. Mohajerani</i>	874
A BUILD-OPERATE-TRANSFER MODEL PROPOSED FOR DEVELOPMENT OF INDONESIAN AIRPORTS <i>S. Hamzah and S. A. Adisasmita</i>	881
THE RESEARCH IN LANDSCAPE STYLE DESIGN ALONG CRANE CREEK RIVER IN JINGNING, ZHEJIANG PROVINCE <i>W. Jieqiong and Z. Yuheng</i>	887
CALCULATION METHOD RESEARCH OF ENERGY CONSUMPTION AND CO2 EMISSION OF BUILDINGS IN ZHEJIANG PROVINCE BASED ON LIFE CYCLE ASSESSMENT <i>Z. Yun, Y. Yan, G. Min and G. Jian</i>	893
THE CONTROLLING AND PREVENTING STRATEGIES OF ACID RAIN POLLUTION BASED ON ECOLOGICAL INFRASTRUCTURE PLANNING: A CASE STUDY OF TAIZHOU CITY <i>J. Wang, J. Jiang and C. Zhang</i>	904

PART 4

COASTAL ENVIRONMENTAL-SCIENCE AND ENGINEERING

CHAPTER 1 : PROTECTION, PREVENTION OR MITIGATION OF COASTAL ENVIRONMENTS

INFLUENCE OF UNDERWATER SILL LAYOUT AGAINST FLOW PATTERNS IN ORDER TO REDUCE SEDIMENTATION IN NAVIGATION CHANNEL AND BASINS <i>T. E. Bhakty, T. S. Putri, N. Yuwono, R. Triatmadja and B. Triatmodjo</i>	912
RHEOMETRIC CHARACTERIZATION OF THE FLUID MUD FORMING POTENTIAL OF A BAY MUD <i>F. Samsami, Y. P. Khare and A. J. Mehta</i>	917
LEARNING MEDIA OF RUBBLE-MOUND BREAKWATERS DESIGN <i>O. Pattipawaej, Sinatra and K. T. Tanamal</i>	922
THE MANGROVE CONSERVATION APPROACHED FROM PEOPLE SIDES IN LAGOON OF SEGARA ANAKAN <i>P. Sudjono and Z. Perdana</i>	930
FLUIDIZER SYSTEM DESIGN FOR MAINTENANCE DREDGING: A CASE STUDY ON THE RIVER MOUTH SURROUNDING BANTAENG COASTLINE, INDONESIA <i>M. A. Thaha, N. Yuwono and R. Triatmadja</i>	936
NATURAL SUCCESSION VEGETATION AREA CHARACTERISTICS IN THE TAILINGS DEPOSITION AREA OF PT FREEPORT INDONESIA AT PAPUA INDONESIA <i>Y. Windusari, Z. Dahlan, I. Yustian and P. Puradyatmika</i>	944
ACCUMULATION OF HEAVY METALS IN COASTAL SEDIMENT; CHONBURI TO PATTAYA COAST LINE <i>S. Khuntong , W. Sudprasert , P. Sittipo 1 and S. Treerat</i>	951

CHAPTER 2 : MONITORING AND MODELLING IN ESTUARIES AND COASTAL AREAS

A STUDY ON IMPACT OF STORM SURGE BY TYPHOON PAT (T198513) IN SAGA LOWLAND AND SURROUNDINGS USING HYDRODYNAMIC NUMERICAL MODELLING <i>A. K. T. Dundu and K. Ohgushi</i>	961
MODELING SEDIMENT TRANSPORT FOR BAU-BAU ESTUARY, INDONESIA <i>A, Asri, M. A. Abdurrahman and St. Hijraini</i>	969
STUDY ON DISSOLVED SILICA IN THE ARIAKE SEA USING THE FINITE VOLUME MODEL <i>N. Vongthanasunthorn, Y. Hamazaki, Y. Mitsugi, and K. Koga</i>	973
SHORELINE BEHAVIOUR AROUND THE INLET OF IMAGIRE-GUCHI <i>A. S. Mustari, S. Kato and S. Aoki</i>	979

MODELING OF WAVE INDUCED CURRENT AND BEACH MORPHOLOGY CHANGE <i>Tamrin, D. Kardana N and S. Pallu</i>	986
----------------------------------------------------------------------------------------------------------------	-----

PART 5

GIS Application for Lowland Management

LANDSLIDE SUSCEPTIBILITY MAP USING BIVARIATE STATISTICAL ANALYSIS, A CASE STUDY IN BOGOTA <i>A. H. Sourin, A. Abedini and S. Parang</i>	991
REMOTE SENSING IMAGE-BASED ANALYSIS OF THE URBAN HEAT ISLAND IN DENPASAR, INDONESIA <i>Abd. R. As-syakur , I W. Nuarsa, I W Arthana, M. S. MahendraI, I W. S. Adnyana, I N. Merit, R. Suyarto, and K. A. Lila</i>	997
MEASURING LAND SUBSIDENCE OF MAKASSAR CITY USING DINSAR OF JERS-1 IMAGES <i>I. Alimuddin , L. Bayuaji , J. T. S. Sumantyo and H. Kuze</i>	1005
TRACE ELEMENT SPATIAL ABUNDANCE MAPPING IN GROUNDWATER OF PARAVANAR SUB BASIN, TAMIL NADU, INDIA USING GIS TECHNIQUE <i>S. Aravindan, K. Shankar and B. Poovalinganganesh</i>	1010
A STUDY ON ECO-ENVIRONMENTAL CHANGES OF WETLAND RESOURCES OF HAKALUKI HAOR IN BANGLADESH BY USING GIS TECHNOLOGY <i>M. J. Uddin , A. S. M. Mohiuddin and S. T. Hossain</i>	1021
WEB-GIS DATABASE MODEL APPLIED IN POLDER BANGER <i>S. Darsono</i>	1026
ELASTO-PLASTIC BEHAVIOR OF RC FRAMES COMPOSED OF TUBED REINFORCED CONCRETE SHORT COLUMNS AND SPANDREL WALLS <i>Nasruddin and A. Kawano</i>	1030
FLOODWATERS AT THE TALLO RIVER FLOWS USINGGEOGRAPHIC INFORMATION SYSTEMS (STUDIES CASE MAKASSAR CITY) <i>M. P. Hatta, M. S. Pallu and I. Hadi</i>	1040
MAPPING THE LOCATION OF ARTERIAL ROAD CONGESTION AND HIGHWAY PERFORMANCE – BASED QUANTUM GIS OPEN SOURCE IN MAKASSAR CITY, SOUTH SULAWESI <i>S. Rauf, S. A. Sasmita , St. Hijraini and A. R. Djamaluddin</i>	1044
EFFECTS OF ORGANIC ACID TREATMENT ON CHEMICAL AND MECHANICAL CHARACTERISTICS OF TIDAL MUD OF ARIAKE SEA <i>K. Katae, D. Suetsugu , H. Hara and S. Amamoto</i>	1051
ESTIMATION OF WEAKZONES USING GEOSTATISTICAL APPROACH ON DEPOSITION AREA LEEVE <i>B. Setiawan, F. Hadinata, Z. G. Fad and U. S. Minaka</i>	1055

ESTIMATION OF GHG EMISSION ON URBAN SOLID WASTE MANAGEMENT USING EVENT TREE ANALYSIS APPROACH <i>F. Hadinata, D. P. Apriadi and B. Setiawan</i>	1060
KENAF WOVEN LIMITED LIFE GEOTEXTILES (LLGS) REINFORCEMENT INTERACTION BY PULLOUT AND DIRECT SHEAR TESTS <i>S. Artidteang, D. T. Bergado, T. Tanchaisawat and S. Chaiyaput</i>	1066
AN ANALYSIS OF FACTORS AFFECTING THE QUALITY OF SERVICE AND SATISFACTION AND THEIR IMPACT ON THE LOYALTY OF PUBLIC TRANSPORTATION USERS IN SULAWESI <i>L. B. Said</i>	1072

PART 1

GEOTECHNICAL/GEOENVIRONMENTAL ENGINEERING

CHAPTER 1 :	PROPERTIES OF SOILS (1)	pages 40-81
CHAPTER 2 :	GROUND IMPROVEMENT AND GEOSYNTHETICS (1)	pages 82-110
CHAPTER 3 :	LAND SUBSIDENCE	pages 111-142
CHAPTER 4 :	GEOENVIRONMENTAL ISSUES IN LOWLAND AREA	pages 143-183
CHAPTER 5 :	PROPERTIES OF SOIL (2)	pages 184-226
CHAPTER 6 :	GROUND IMPROVEMENT AND GEOSYNTHETICS (2)	pages 227-266

PREDICTION FOR CBR UNSOAKED VALUE TO CBR SOAKED VALUE AND INDEX PROPERTIES OF CLAY-SAND MIXTURE OF PEKANBARU SOILS

S. A. Nugroho ¹, Yusa M. ² and Ningsih, S. R. ³

ABSTRACT: In design of highway, soil bearing capacity is very affecting the thickness of pavement. One of the methods to determine the soil bearing capacity in Indonesia is CBR (California Bearing Ratio) test. The field soil conditions are soaked (saturated) and un-soaked, considering these conditions, conducted CBR testing in the laboratory on soaked and un-soaked conditions. This research aims to make comparisons between CBR soaked test results for CBR un-soaked in some variation of clay content and make simple comparisons between CBR soaked for CBR un-soaked by considering the soil properties whereas can be predicted the CBR soaked value based on the CBR un-soaked test results. The results showed that there was a linear correlation between the CBR soaked and CBR un-soaked also influenced by the nature of the index (the properties of the soil). The maximum value of CBR ranges of 30-40 percent clay content.

Keywords: California Bearing Ratio, soaked and un-soaked, correlation, clay

INTRODUCTION

Sub-Grade soil bearing capacity plays very important role for the design of highway structure. It determines design thickness of the pavement. High bearing capacity of sub-grade soils reduces the required thickness of pavement. The bearing capacity of sub-grade (base soil) is mostly influenced by the type of soil, water content and its density. Several methods are available to determine base soil bearing capacity such as California Bearing Ratio (CBR) test, Plate Bearing test (to determine modulus of sub-grade reaction and modulus of resilient), Dynamic Cone Penetrometer (DCP) test, Machintosh Probe (Nugroho, 2012) and Hand Cone Penetrometer (HCP) test, which is also known as Proving Ring Penetrometer (Farshad, 2003)

It is common in Indonesia that the base soil bearing capacity for highway pavement design is determined by CBR test measurement. This can be from the laboratory CBR test or directly from field CBR test. However, base soil bearing capacity can also be determined using field tests such as DCP, HCP, and Machintosh Probe. These tests are much simpler and faster to perform. Correlation between the result of DCP test and CBR value, CBR test and HCP (Nugroho, 2012) test are available whereas the prediction between the result of CBR laboratory soaked test and CBR laboratory soaked value is hardly found.

Moreover, this prediction should be determined locally based on common local experience.

This research is aimed to obtain a local correlation between the results of CBR laboratory test without soaked and CBR soaked value. The correlation is based on the comparison CBR un-soaked test results and CBR soaked value which has the same fraction of sand and clay in soil

LITERATURE REVIEW

Proctor Compaction Test

The Proctor compaction test is a laboratory method of experimentally determining the optimal moisture content at which a given soil type will become most dense and achieve its maximum dry density. These laboratory tests generally consist of compacting soil at known moisture content into a cylindrical mould of standard dimensions using a compactive effort of controlled magnitude. The soil is usually compacted into the mould to a certain amount of equal layers, each receiving a number blows from a standard weighted hammer at a specified height. This process is then repeated for various moisture contents and the dry densities are determined for each. The graphical

¹ Soil Mechanics Laboratory, Civil Engineering Department, University of Riau, Pekanbaru 28293, INDONESIA

² Doctoral Program, Department of Civil and Natural Resources Engineering, University of Canterbury, NEW ZEALAND

³ Undergraduate Program, Civil Engineering Department, University of Riau, Pekanbaru, INDONESIA

relationship of the dry density to moisture content is then plotted to establish the compaction curve. The maximum dry density is finally obtained from the peak point of the compaction curve and its corresponding moisture content, also known as the optimal moisture content (OMC).

The testing described is generally consistent with the American Society for Testing and Materials (ASTM) standards, and are similar to the American Association of State Highway and Transportation Officials (AASHTO) standards. Currently, the procedures and equipment details for the standard Proctor compaction test is designated by ASTM D698 and AASHTO T99. Also, the modified Proctor compaction test is designated by ASTM D1557 and AASHTO T180.

California Bearing Ratio (CBR) Test

The equipment for determining CBR value is a piston having an area of three square-inches. The piston is moved in vertical direction on a soil sample with a speed of 0.05 inch/minute. A Proving ring with dial gauge is attached to the piston to measure the load at certain penetration. The CBR value is the comparison between applied piston loads on a soil sample and the standard loads, which value is expressed in percentage (ASTM D-1883, AASTHO T-193).

Basically, the CBR value describes the strength soil compared to the standard material. Indirectly, it also describes the relative density of the soil. Several correlations between CBR values and the results of other field measurements exist such as to results of Dynamic Cone Penetrometer (DCP) test (Van Vuuren, 1969, Klimochko, 1991, Smith and Pratt, 1983). This has been used in practice.

A comparative study of HCP and CBR field tests has been performed by Nugroho et al. (2011) on peat, sand, clayey sand and clays soil. The study was aimed to indirectly relate the value of CBR un-soaked to CBR soaked value through the comparison of the results of HCP to CBR field tests. From the point of view of testing mechanism, CBR field test and CBR laboratory test procedures are the same. CBR field test uses static penetration whereas HCP is also uses quasi-static penetration test. Compared to CBR un-soaked test, which is also a quasi-static penetration test, CBR laboratory is a closer method. Hence, direct correlation between CBR un-soaked tests results to CBR soaked value seems to be more relevant. This correlation can be based on the same soil mixture. This study aims to

obtain direct local correlation between the two latest two tests.

MATERIALS AND METHODS

In order to obtain the correlation between CBR soaked test and CBR un-soaked test results, comparison of two kind CBR test condition of several mixture soil samples from Pekanbaru were performed. The CBR tests of two condition tests were performed for each mix-soil sample from each variation. Thus, the density before and after soaked of the soil for both tests is the same for each soil from each condition. There were 45 CBR soaked tests and 45 CBR un-soaked tests performed at nine conditions of sand and clay mixture soil within the city of Pekanbaru, Indonesia. The result of index properties can be seen in Table 1. For index properties, soil can be classification for sand poorly graded (SP) to clay with low plasticity (CL)

Table 1 Properties of Materials


Clays	LL (%)	PL (%)	Gs	USCS
0	NP	NP	2,671	SP
30	13,58	2,43	2,677	SM
40	16,87	5,56	2,679	SM-SC
45	19,16	6,86	2,681	SM-SC
50	20,36	7,84	2,684	SC
55	20,54	7,96	2,688	CL
60	23,81	9,86	2,704	CL
70	25,63	8,32	2,699	CL
100	37,73	16,19	2,75	CL

Materials

Materials required for field tests are a set field CBR tools and a CBR mould. The CBR mould was used to obtain undisturbed sample for determination of physical and mechanical properties of the soil in laboratory and CBR mould uses to determine CBR value after soaked in the Laboratory for 7 (seven) days. Along mould containing specimen soaked, swelling of the specimen should be noted to know swelling potential of the soil from different location. Figure 1 shows the layout of CBR test in the field (un-soaked) and in the Laboratory (soaked)



a. CBR Laboratory

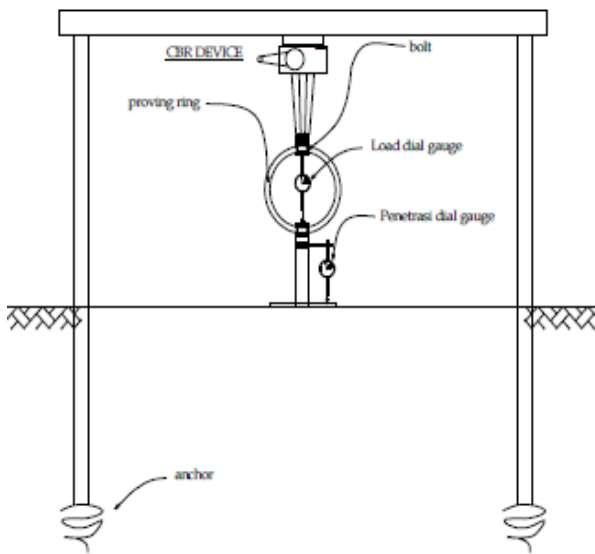

b. Field CBR equipment

Fig. 1 Testing Equipment

Methods

Surcharge weights of 2.5kg are placed on top surface of soil. The penetration plunger is brought in contact with the soil and a load of 4kg (seating load) is applied so that contact between soil and plunger is established. Then dial readings are adjusted to zero. Load is applied such that penetration rate is approximately 1.25mm per minute. Load at penetration of 0.5, 1, 1.5, 2, 2.5, 3, 4, 5, 7.5, 10 and 12.5mm are noted.

The CBR soaked (CBR tested in laboratory) tests were performed simply. After mould containing specimen soaked about 7 days, mould containing specimen is placed in position on the testing machine, by pressing the piston into the mould containing specimen from different locations. After that, load is applied such that penetration rate is 1.25mm per minute and then the tests were performed. For the determination of the

physical and mechanical properties of the soils, undisturbed samples were taken from each location and the tests were done in laboratory.

RESULTS AND DISCUSSION

The results of this research are presented in three parts. First, the results of the all performed tests are described. After that regression analysis between CBR test results and filed CBR values as well as regression of fraction clay with G_s , Atterberg limits, unit weight density of the soils are shown. In the final part, the correlation between CBR soaked tests results and CBR un-soaked test results are put forward

Physical and Mechanical Properties of Test Samples

The test results of physical and mechanical properties of the samples can be divided into four categories based on the type of soils as seen in Table 2 and Table 3.

Table 2: Physical and Mechanical Properties of CBR unsoaked Test Samples

Sand (%)	Clay (%)	w (%)	γ_d (kN/m ³)	CBR (%)
100	0	7.5	16.24	12.710
70	30	10.70	20.50	34.005
60	40	11.75	20.09	14.433
55	45	12.60	19.75	14.738
50	50	12.80	19.65	13.927
45	55	12.85	19.18	13.509
40	60	14.00	19.12	13.411
30	70	14.75	18.68	13.786
0	0	14.85	16.31	4.739

Table 3: Physical and Mechanical Properties of CBR soaked Test Samples

Sand (%)	Clay (%)	w (%)	γ_d (kN/m ³)	CBR (%)
100	0	9.379	16.05	9.573
70	30	10.276	19.13	21.286
60	40	12.648	18.18	8.910
55	45	13.726	18.25	4.976
50	50	13.889	18.61	4.979
45	55	14.223	18.16	3.862
40	60	15.510	17.98	3.507
30	70	19.153	17.05	1.625
0	0	24.805	15.71	2.795

For the soils which are considered as in-organic soils (Sand, Clay, Sand-Clay mixture), in general, they have water content, w_n between 7.50–14.85%, dry unit weight, γ_d between 16.24–20.50 kN/m³ in field (un-soaked) and have water content between 9.379–24.805%, dry unit weight between 15.71–19.13 kN/m³ (after soaked in laboratory). Furthermore, It was recorded that the values of CBR un-soaked tests on those soils are between 4.739–34.005% and CBR soaked values between 2.795–21.286% (see Table 2 and Table 3). It is shown that the range of the physical and mechanical properties the soils varies considerably.

As also can be seen in Table 2 and Table 3, for sand soil (sand poorly graded, SP), its properties (water content, dry unit weight, CBR value) are not different compared between soaked and un-soaked condition showing that it has a significant characteristic compared to the other samples. The soils with clay fraction 70% and sand fraction 30% of sample CBR value is far above the maximum CBR value of all soils. The values of its dry unit weight, CBR soaked, and CBR un-soaked are far below the values of the other soils.

Regression Analysis of CBR, Index Properties and Unit Weight Density

Figure 2 to Figure 4 show the results of regression analyses between clay fraction, index properties and unit weight density tests results as well as regression results between CBR un-soaked and CBR soaked test results. The regression analyses are made for each clay fraction of soils which are 0% clay, 0% sand, clay and sand and clay mixture.

It can be seen that regression using linier function suits the relation between water content and clay fraction relatively accurately whereas for the relation between Atterberg limits and clay fraction, second order polynomial function shows relatively accurate approximation. The two regression analyses will be combined later using Pearson's correlation method to find the correlation between CBR test results and Atterberg limit with unit weight density.

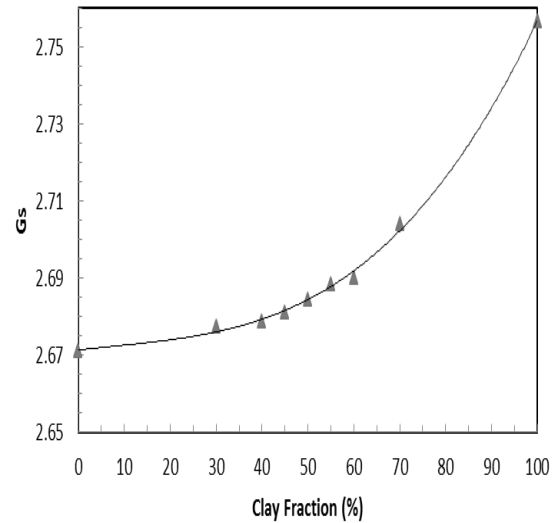


Fig. 2 Regression results for Specific Gravity

Figure 3 shows that the value of liquid limit and plastic limit of soils increased with increasing clay fraction in the soil. Gradient increasing of liquid limit higher than plastic limit of soil. So, plasticity index of soils increases in proportion to the increase in soil clay fraction. Figure 3 also shows that optimum moisture content, determined from compaction test, same as with value of plastic limit at clay fraction between 30% and 70%. It means that for sand clay soils with for 30% to 70% clay fraction, water content for CBR test can be approximated by the value of the soil plastic limit.

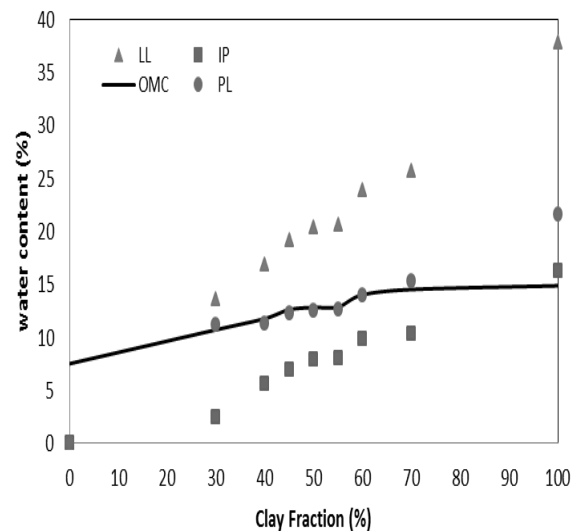


Fig. 3 Relationship between clay fraction and water content

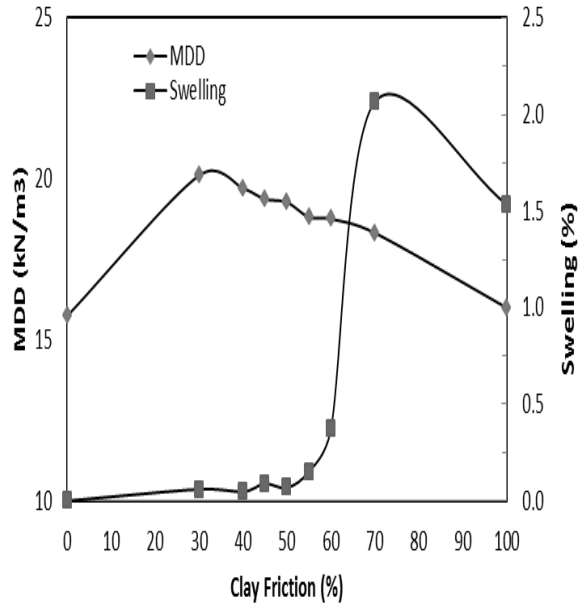


Fig. 4 Regression Results for Clay

It can be seen from Figure 4 that for the clay fraction smaller than 70%, swelling is relatively smaller. Therefore, potential swelling for soil containing fine grain smaller than 70% is relatively small.

Figure 4 shows that maximum density is on a combination of 30% clay and 70% sand. In other words, it is the best composition to obtain the optimal value of CBR is in the range of 30-70% clay fraction. Fraction of clay between 30% and 70%, soil density is more than 90% of the value of density of 30% clay and 70% sand.

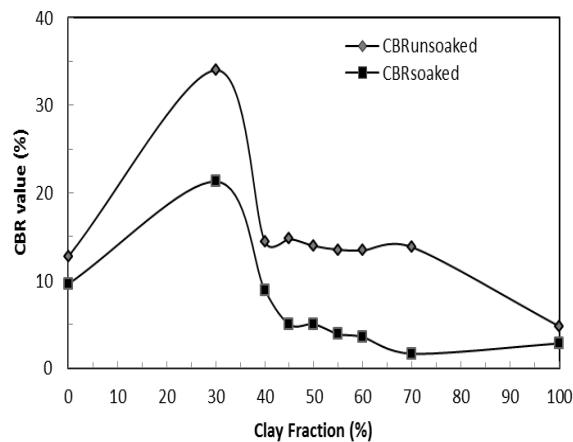


Figure 5 Regression Results for Sand-Clay Mixture

Figure 5 shows that the difference of the results of the CBR un-soaked and the CBR soaked are increase for 0% to 30% fraction of clay and then decreases again up to 45% fraction of clay. For clay fraction more than 45% difference between the CBR un-soaked and CBR soaked tend to a constant.

Correlation CBR Test Results

In the previous section, relations between Clay Fraction and index properties as well as between clay fraction and soil density have been obtained. In order to correlate the CBR un-soaked test results to CBR soaked CBR value, Pearson's correlation method is applied to both obtained power and polynomial functions for each type of soils.

On using soil index properties (liquid limit, index plasticity) and the value of unit weight density (OMC, MDD) test as variables, the following linear equation can be applied to find simple correlation between CBR soaked and CBR un-soaked on the basis of the same clay fraction value of (Nugroho, 2011)

$$\Delta Y = b_0 + b_1 X_1 + b_2 X_2 + b_3 X_3 + b_4 X_4 \quad (1)$$

with

b_0, b_1, b_2, b_3, b_4 = constants

ΔY = value of CBR un-soaked – CBR soaked (%)

X_1 = clay fraction (%)

X_2 = value of liquid limit (%)


X_3 = value of plasticity index (%)

X_4 = value of optimum water content (%)

The values of the constants b_0, b_1, b_2, b_3, b_4 can be solved using SPSS software which is based on the solution of the following matrix

$$\begin{bmatrix} 9 & \sum X_1 & \sum X_2 & \sum X_3 & \sum X_4 \\ \sum X_1 & \sum X_1 X_1 & \sum X_1 X_2 & \sum X_1 X_3 & \sum X_1 X_4 \\ \sum X_2 & \sum X_2 X_1 & \sum X_2 X_2 & \sum X_2 X_3 & \sum X_2 X_4 \\ \sum X_3 & \sum X_3 X_1 & \sum X_3 X_2 & \sum X_3 X_3 & \sum X_3 X_4 \\ \sum X_4 & \sum X_4 X_1 & \sum X_4 X_2 & \sum X_4 X_3 & \sum X_4 X_4 \end{bmatrix} \begin{bmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \\ b_4 \end{bmatrix} = \begin{bmatrix} \sum \Delta Y \\ \sum X_1 Y \\ \sum X_2 Y \\ \sum X_3 Y \\ \sum X_4 Y \end{bmatrix} \quad (2)$$

It was found that value for b_0, b_1, b_2, b_3 and b_4 are $-25.28, 0.168, -0.064, -2.356$ and 3.562 respectively for all soils. However, for the value of a_3 , there is no unique solution for all soils

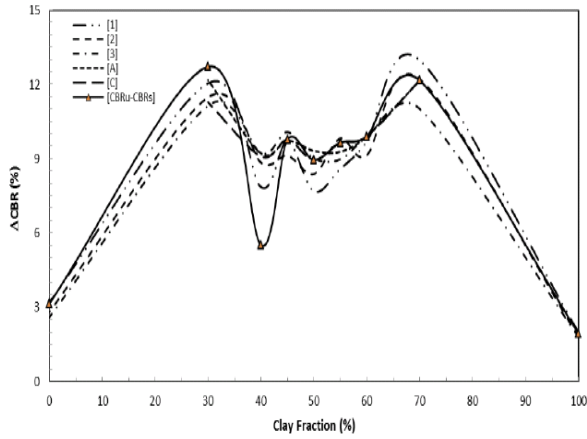

The correlation formula obtained from the correlation analyses can be written as follow:

$$\Delta CBR_{[1]} = 10.78 + 0.01C + 0.01LL - 4.41IP + 6.37OMC - 2.15MDD \quad (3)$$

$$\Delta CBR_{[2]} = -25.75 + 0.34C - 0.53LL - 2.63IP + 3.81OMC \quad (4)$$

$$\Delta CBR_{[3]} = -25.91 + 0.09LL - 0.98IP + 3.80OMC \quad (5)$$

$$\Delta CBR_{[A]} = -2.25 + 2.19LL - 2.98IP - 0.76OMC \quad (6)$$

$$\Delta CBR_{[C]} = -25.28 + 0.17C - 0.06LL - 2.35IP + 3.56MC \quad (7)$$

It is found that the value of b_0 of -25, suits for equation (4), (5) and (7), clay and sand-clay mixture (in-organic soils) whereas for the solution of b_0 is for minus 25 to minus 26.

The final correlation formula can be written as follow:

$$\Delta CBR = -25 + C_1 C + C_2 LL + C_3 IP + 3.5 OMC \quad (8)$$

Where C_1 , C_2 and C_3 is 0.34; -0.53 and -2.63 for sand, clay and sand-clay mixture (in-organic soils). ΔCBR is the value of CBR un-soaked-CBR soaked.

For soils containing clay between 30 and 70%, the value of C_2 need to be further tested and the C_3 value is 2.35. The formula can be rewritten below.

$$\Delta CBR = -25 + 0.168 C - 0.064 LL - 2.356 IP + 3.5 OMC \quad (9)$$

Validation of the Correlation Formula

For the validation of Equation (9), several prediction tests have been performed. Figure 7a to figure 7b show the comparison between predicted values of field CBR and measured field CBR values for different soil types and soil densities.

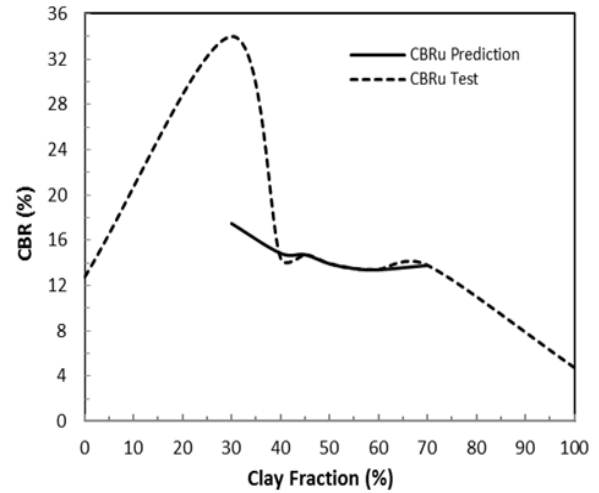


Fig. 6 Predicted and Tested CBR un-soaked (30-70%)

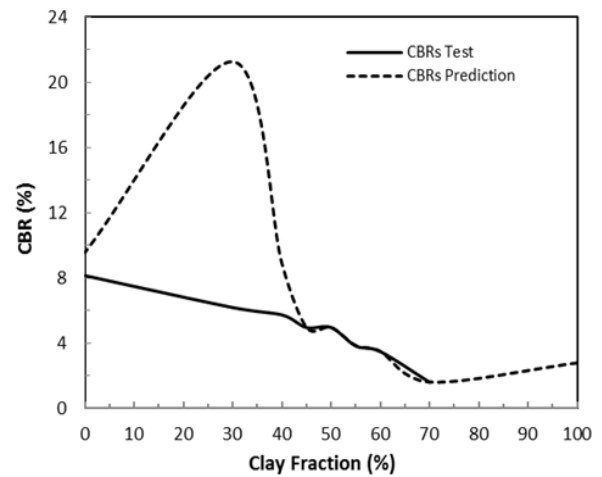


Fig. 7 Predicted and Tested CBR soaked (0-70%)

It can be seen from Figure 6 to figure 7; the predicted field CBR values give significant agreements with the measured field CBR from the tests for soils that containing clay between 30% and 70%. On the other hand, very poor agreements were found for soils contain clay less than 30% and more than 70%. Hence, the local correlation formula is only valid for in-clayey sand or sandy clay.

CONCLUSIONS

This research has been performed to find local correlation between CBR un-soaked test results and CBR soaked values. A linear correlation has been put forward for the local correlation between the two values. Verification of the formula shows that the correlation

can be used relatively accurately for predicting the difference CBR values from the CBR with and without soaked test for in-organic soils (sand, clay and sand-clay mixture). The formula needs to be modified and further research need to be done for peat soils.

REFERENCES

- Annual Book of ASTM Standards, 1997, Standard Test Method for CBR (California Bearing Ratio) of Laboratory-Compacted Soils, ASTM D1883, West Conshohocken, PA
- Anonyms, 2007, In Situ Testing and Soil properties Correlation, International Conference on In Situ Measurement of Soil Properties and Case Histories, Bali, Indonesia
- CRAIG, R., F, 2004, Soil Mechanic, 7th Edition, Taylor & Francis e-library, McGraw-Hill 270 Madison Ave, New York, USA.
- DAS, Braja, M., 2008, Advanced Soils Mechanic, 3rd Edition, Taylor & Francis Group, McGraw-Hill 270 Madison Ave, New York, USA
- FARRSHAD A, 2003, Potential Applications of dynamic and Static Cone Penetrometer in MDOT Pavement Design and application, Final Report, Department of Civil Engineering Jackson State University, Corporate Department of Transportation and US Department of Transportation Federal Highway Administration, Mississippi
- KLIMOCKO, Dennis, 1991, the Application of the Dynamic Cone Penetrometer Test in Determining In Situ Sub-grade CBR. Paper submitted for the 44th Annual Conference, Saskatoon, Western Association of Canadian Officials, Geotechnical and Materials Branch, Saskatchewan Highways and Transportation, Regina, Saskatchewan, Canada.
- SMITH, R.B., and PRATT, D.N.,1983, *A Field Study of In Situ California Bearing Ratio and Dynamic Cone Penetrometer Testing for Road Design Investigations*, Australian Road Research, pp. 285-294,
- VAN VUUREN, 1969, *Rapid Determination of CBR with the Portable Dynamic Cone Penetrometer*,. Reprint from "The Rhodesian Engineer".